




ISUZU CITIPORT

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

TECHNICAL SPECIFICATIONS

Dimensions (mm)	
Maximum Length	12030
Maximum Width	2550
Maximum Height	3136
Wheelbase	5850
Front Overhang	2700
Rear Overhang	3480
Weights (kg)	
Gross Vehicle Weight	17.900
Engine	
Model	CUMMINS ISB6.7E6C 300B (S)
Type	Diesel EGR Turbocharged
Number of cylinders	6
Engine volume (cm ³)	6700
Maximum power (kW (HP) / rpm)	220 (300) / 1400
Maximum torque (Nm/rpm)	1182 / 1150 - 1400
Transmission	
Model	ZF ECOLIFE 6AP 1200B
Tyres	
	275/70 R22,5
Suspensions	
Front	Air Suspension - 2 Air Bellows Independent Suspension
Rear	Air Suspension - 4 Air Bellows
Kneeling System	S
Brake System	
Front / Rear	Disc / Disc
System	EBS, ABS, ASR
Service	Full Air Brake System, Dual Circuit, Electronical actuated
Auxiliary Brake	Turbo Brake and Retarder
Fuel Tank	
Fuel Tank Capacity (lt)	300
Diesel Exhaust Fluid Tank(lt)	47
Electrical System	
Battery	24V - 2 x 240 Ah
Generator	2 x 120A
Passenger Capacity*	
	27 (24 fixed+3 foldable) passenger seats + 1driver's seat (maximum 78 standing passengers when foldable seats are closed)

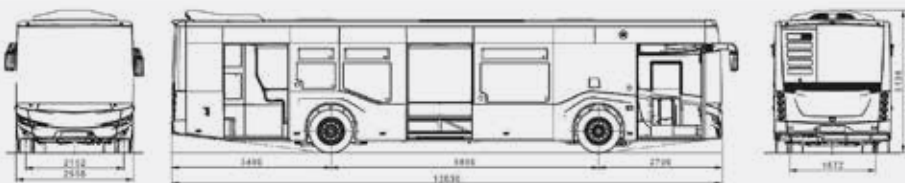

EQUIPMENTS

General	
Digital Tachograph	S
Multiplex System	S
Heating and Ventilation	
Pre-heater	Opt
Heater (Front/Middle/Rear)	S
Air Conditioner	
Digital Air Conditioner**	S (39 kW)
A/C with Heater	Opt (Heating Capacity 44 kW)
Safety & Driving Comfort	
Roof emergency escape hatch & roof ventilation hatch	S (2 units with electrical control)
Parking Sensor	S
Rear view camera	S
Interior Camera	S (DVR recording device is standard)
Exterior camera	S (On exterior right and left side rear view mirrors)
Retarder	S (Intarder by automatic gearbox)
ABS	S (EBS)
ASR	S (EBS)
Automatic fire extinguisher system at engine room	Opt
Engine room fire detect and driver alert system	S
Automatic engine oil refill system	Opt
Automatic front axle lubrication	Opt
Fire extinguisher	2 x 6kg
Speed limiter	S
Electrically Controlled Side View Mirrors	S
Heated Side View Mirrors	S
Daytime Running Lamps (DRL)	S
Front and Rear Fog Lamps	S
Towing Device	S (Front / Rear)
Doors	
Number of Service Doors	3 Doors (S) 2 Doors (Opt)
Type of Service Doors	Double Wings, Pneumatic, Inward Swing
Disabled Passenger Access	Ramp for Middle Door & Kneeling System
Windows	
Windshield	Single Piece Laminated
Driver's Window	With resistance heater, electrical control
Blind	Electrical Control For Windscreen Roller Blind; Manual Control For Driver Window Roller Blind
Passenger Windows	Single Piece, Non-sliding
Hinged window	1/4 Hinged Passenger Windows
Interior	
Driver Seat	
Driver's Seat	Air actuated, Adjustable, With Headrest
Driver's Cabin Semi Glass	S
Driver Overhead Cabinet	S (Locker)
Ticket Box Pre-arrangement	Opt
Passenger Compartment	
Seat Material	Cloth Ped On Plastic
Interior Lining (Ceiling)	Formica
Sidewall Lining	FRP
Interior Lighting (Ceiling)	S
Audio & Visual	
Stop Sign (Interior)	S
Info Panel for Passengers	Front (S), Rear (Opt)
Digital Destination Indicators	Rounding LED-type Headsign (Front and Side) (S), Rear Indicator Panel (S), Colored Headsign (Not Rounding) (Opt)
Announcement System Preperation	S (Interior / Exterior)
LCD Screen	S (1 Unit, Front); Opt (2 Units, Middle)
Digital Clock	S
DVD Player	S
Interior Luggage Space	S

S: Standard **Opt:** Optional

* Different seating variations are available.

**Different A/C options are available.

ANADOLU GROUP